


RS MaxLiner[®] Hose liners

Flex

- Flexible needle felt liner with PU coating
- Bendable up to a maximum of 45°
- Wall thickness stable needle felt material (ensures 3 mm minimum wall thickness)
- Cold curing and warm curing with water or steam
- Available from DN 70 to DN 400


Flex

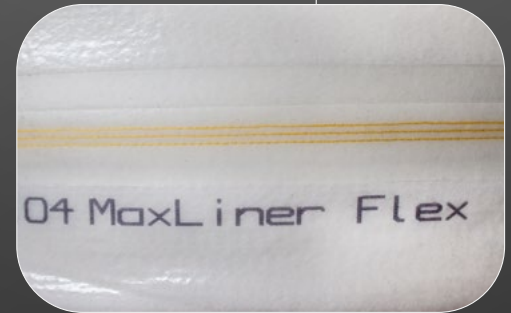

Flex S

- Highly flexible needle felt liner with PU coating
- Bendable up to a maximum of 90°, one dimension change possible
- Installations with closed end can also be implemented when changing dimensions
- Wall thickness stable needle felt material (ensures 3 mm minimum wall thickness)
- Cold curing and warm curing with water or steam
- Available from DN 70 to DN 400

Flex S

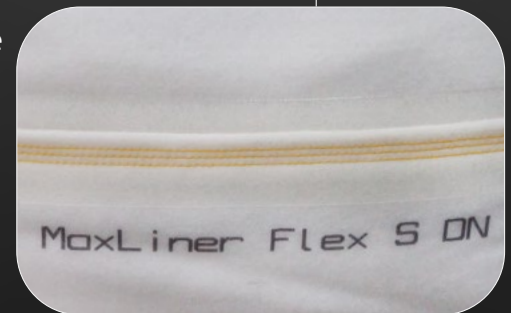

Flex 4D

- Extremely flexible needle felt liner with PU coating
- Bendable up to a maximum of 90°, up to 4 dimension changes possible (DN 150 - DN 250)
- Installations with closed end can also be implemented when changing dimensions
- Wall thickness stable needle felt material (ensures 3 mm minimum wall thickness)
- Warm curing with water or steam
- Available from DN 75 to DN 400

Flex 4D





SuperFlex

SuperFlex

- Seamless, flexible polyester fibre hose with PU coating
- Bendable to a max. of 90°, one dimension change possible
- For dimension changes and bends, a calibration hose is to be used
- Cold curing and warm curing with water
- Available from DN 70 to DN 200

Fix

- Highly flexible needle felt liner with PU coating
- Bendable to a max. of 90°, one dimension change possible
- Installations with closed end also with dimension change possible
- Wall thickness stable needle felt material (ensures 4.5 mm minimum wall thickness)
- Cold curing and warm curing with water or steam
- Available from DN 100 to DN 400



Fix