

# RS MaxPatch<sup>®</sup> Consumables



*RS MaxPatch<sup>®</sup>  
Komp. A 2K Fast*



*RS MaxPatch<sup>®</sup>  
Komp. A Winter*



*RS MaxPatch<sup>®</sup>  
Komp. A Summer*



*RS MaxPatch<sup>®</sup>  
Komp. C*

## Features & Benefits

Silicate-isocyanate resin with very good adhesion properties and chemical and thermal resistance

Available as three- or two-component system

Adjustment of the processing time by targeted dosing of the C-component

Optimum adaptation to ambient conditions




*RS MaxPatch®  
Komp. B*



*RS MaxPatch®  
Komp. A*

*RS MaxPatch®  
glass mat*

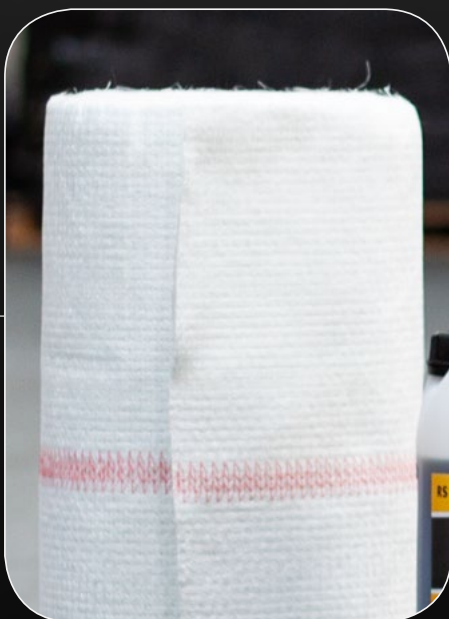

## RS MaxPatch® glass mats

RS MaxPatch Advantex ECR glass

Glass mats rolls 330 mm/ 415 mm/ 510 mm and  
1300 mm wide

Basis weights: 1086 g/ m<sup>2</sup> or 1387 g/ m<sup>2</sup>