

# RS MicroCutter<sup>®</sup> Incl. accessories

The MicroCutter<sup>®</sup> ensures quick and flexible milling as well as effortless opening of inlets.

## Properties

For internal pipe diameter 80 mm to 200 mm

Curved up to 90°


Can be clamped into the pipe (exact milling)

For precise work with integrated swivel gear

Purely pneumatic operation

Scope of delivery: Plastic-box incl. MicroCutter with pneumatic motor and 20 m supply hose, control panel, camera holder, accessories for the inner diameter of the pipes

80 mm - 200 mm and the necessary tool

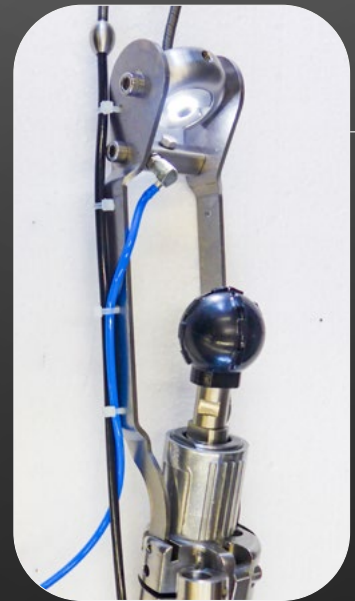

Colour camera mC30Duo  
incl. RS MicroCutter<sup>®</sup>

*Bp dretigniffhandle*



## Technical data

Clamping travel radial: 27 mm

Radial deflection of the milling head: maximum 92°

Radial stroke: 110 mm

Weight MicroCutter: 2,8 kg


(without pneumatic motor and accessories)

Weight equipment: 19,5 kg

Air requirement: min. 700 l / min. at 8 - 10 bar

Motor power: approx. 0.37 kW at 22,000 rpm

Dimensions: l x Ø = 290 mm x 63 mm

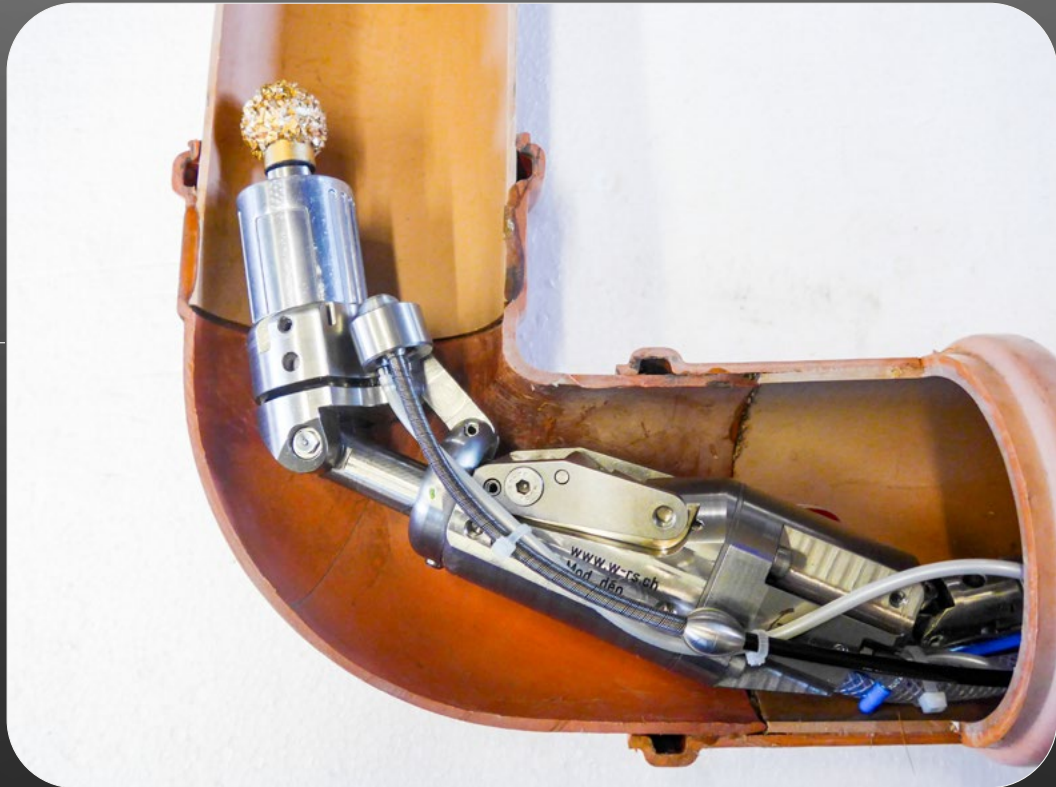

## Colour camera mC30Duo Set

for pipes of 15-200 mm

Camera head diameters: 29 mm and 13 mm

Monitor: 5.6" TFT-LCD with a recorder in carbon casing

Reel made of VA including a locking break,

15 m/ 30 m fibreglass sliding rod

Control unit with continuous light adjustment

Meters counter with electronic video insertion

Rechargeable batteries for over 2h of operating time

Data storage on SD card